

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1095.1138/JDH

First Named Inventor or Application Identifier:

Minoru YAMAMOTO, et al.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 30]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 11]
4. ☒ Oath or Declaration [Total Pages: 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: ____ / ____

18. CORRESPONDENCE ADDRESS

21171

PATENT TRADEMARK OFFICE

NEW APPLICATION FEE TRANSMITTAL

Attorney Docket No. 1095.1138/JDH
Application Number TO BE ASSIGNED
Filing Date October 12, 2000

AMOUNT ENCLOSED \$750.00

First Named Inventor Minoru YAMAMOTO, et al.



FEE CALCULATION (fees effective 12/29/99)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS	6	- 20 =	0	X \$ 18.00 =	\$ 0.00
INDEPENDENT CLAIMS	2	- 3 =	0	X \$ 80.00 =	0.00
MULTIPLE DEPENDENT CLAIMS (any number; if applicable)				+ \$260.00 =	0.00
				BASIC FILING FEE	710.00
				Total of above Calculations =	\$ 710.00
Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)					0.00
Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).					- 0.00
				TOTAL FILING FEE =	\$ 710.00
Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))					0.00
Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))					40.00
				TOTAL FEES DUE =	\$ 750.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.

19-3935

Deposit Account Name

STAAS & HALSEY LLP

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	October 12, 2000

SERVER STORING PROCESSING RESULT OF FIRST REQUEST AND
RETURNING STORED PROCESSING RESULT IN RESPONSE TO
IDENTICAL REQUESTS

5 BACKGROUND OF THE INVENTION

1) Field of the Invention

The present invention relates to a server, which
executes processing in response to a request transmitted
10 from a client, and returns the result of the processing
to the client.

2) Description of the Related Art

For example, when a client acquires information
15 from a WWW (World Wide Web) server through the Internet,
generally, a protocol called HTTP (Hyper Text Transfer
Protocol) is used for downloading an HTML (Hyper Text
Markup Language) document.

In the above system, a browser of a client
20 transmits a request for processing to a server, the
server executes the requested processing, and a result
of the processing is returned to the client, and
displayed by the browser. That is, processing executed
by the client is only the transmission of the request
25 and the display of the result of the processing executed
by the server, and most of processing is executed by the
server. Therefore, a heavy load is imposed on the server.

Usually, a request is sent from a client to a server when a user manipulates a button which is graphically displayed by a browser on the screen. In the currently prevailing operating systems, various commands
5 are input by double-clicking an icon. Therefore, many users apt to double-click buttons even on the browser screen, due to the habit of double-clicking icons. However, a command is usually input when a button is clicked once on the screen displayed by the browser.

10 Therefore, when a button on the browser screen is double-clicked, two identical commands are transmitted to the server, and the server repeats identical processing twice. Thus, such an unnecessary repeat of identical processing further increases the load imposed
15 on the server, causes delay in processing in the server, and reduces the processing capabilities of the system.

In particular, when the traffic is dense, it takes a long time until a result of processing is displayed after a user requests the processing by manipulating a
20 button. Therefore, users become impatient to see the result of processing, and often click an identical button repeatedly. Such repeated clicking also causes delay in processing in the server.

Further, repeated clicking of an identical button
25 may cause a mismatch between data. For example, when a transmission button is repeatedly manipulated on the screen displayed for member registration, a user may be

doubly registered.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a
5 server which can reduce a load imposed on the server due
to transmission of a plurality of identical requests,
and maintain processing speed even when the server
receives a plurality of identical requests.

Another object of the present invention is to
10 provide a server which prevents occurrence of a mismatch
between data even when the server receives a plurality
of identical requests from a client.

(1) According to the first aspect of the present
invention, there is provided a server comprising: a
15 result storing unit which stores at least one processing
result of at least one request; a receiving unit which
receives a request for processing from a client; a
determination unit which determines whether or not
another request, which is identical to the request
20 received from the client, has already been processed; an
execution unit which executes processing of the request
received from the client, and stores a result of the
processing in the result storing unit when the
determination unit determines that no other request
25 which is identical to the request received from the
client, has been processed; and a transmission unit
which transmits to the client the result of the

processing executed by the execution unit when the determination unit determines that no other request which is identical to the request received from the client, has been processed, and transmits to the client
5 one of the results corresponding to the request received from the client when the determination unit determines that the said another request which is identical to the request received from the client, has already been processed.

10 The server according to the first aspect of the present invention may also have any possible combination of the following additional features (i) and (ii) possibly.

(i) The determination unit may determine
15 whether or not the said another request which is identical to the request received from the client, has already been processed, when the said another request is received from the client.

(ii) The server may further comprise a
20 request storing unit which stores at least one request received from at least one client, a request reading unit which reads out one of the at least one request stored in the request storing unit, and a prohibiting unit which prohibits the operation of the request
25 reading unit after one of the at least one request stored in the request storing unit is read out until a processing result corresponding to the said one of the

at least one request is transmitted to a client.

(2) According to the second aspect of the present invention, there is provided a product for use with a server, the product, when used with the server, is able
5 to output control information which directs the server to realize: a result storing unit which stores at least one processing result of at least one request; a receiving unit which receives a request for processing from a client; a determination unit which determines
10 whether or not another request which is identical to the request received from the client, has already been processed; an execution unit which executes processing of the request received from the client, and stores a result of the processing in the result storing unit when
15 the determination unit determines that no other request which is identical to the request received from the client, has been processed; and a transmission unit which transmits to the client the result of the processing executed by the execution unit when the
20 determination unit determines that no other request which is identical to the request received from the client, has been processed, and transmits to the client one of the results corresponding to the request received from the client when the determination unit determines
25 that the said another request which is identical to the request received from the client, has already been processed.

The product according to the second aspect of the present invention may also have the aforementioned additional features (i) and (ii).

5 The above and other objects, features and advantages of the present invention will become apparent from the following description when taken in conjunction with the accompanying drawings which illustrate preferred embodiment of the present invention by way of example.

10 BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

15 Fig. 1 is a diagram illustrating a basic construction of a server according to the present invention;

Fig. 2 is a diagram illustrating an example of a hardware construction of the server according to the present invention;

20 Fig. 3 is a flow diagram illustrating an example of an operation performed when a client logs in to the server according to the present invention;

Fig. 4 is a diagram illustrating examples of use of FIFOs;

25 Fig. 5 is a diagram illustrating examples of contents of a cache;

Fig. 6 is a diagram illustrating an example of a window displayed on a client;

Fig. 7 is a diagram illustrating the window of Fig. 6 when information items are input into predetermined areas;

Fig. 8 is a flow diagram illustrating an example of processing which the server executes when the server receives a request;

Fig. 9 is a diagram illustrating a window in which a search result is displayed;

Fig. 10 is a diagram illustrating an example of a window displayed for member registration; and

Fig. 11 is a diagram illustrating an example of a window in which a result of the registration is displayed.

15 DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the present invention is explained below with reference to drawings.

(1) Principle of the Invention

20 Fig. 1 is a diagram illustrating a basic construction of a server according to the present invention. As illustrated in Fig. 1, the server 1 according to the present invention comprises a receiving unit 1a, a determination unit 1b, an execution unit 1c, a storage unit 1d, and a transmission unit 1e. Information is exchanged between the server 1 and the clients 3-1 to 3-3 through the Internet 2.

The receiving unit 1a receives a request from one of the clients 3-1 to 3-3. The determination unit 1b determines whether or not processing requested by the client has already been executed. The execution unit 1c
5 executes the processing requested by the client. The storage unit 1d stores a result of the processing requested by the client. The transmission unit 1e transmits the result of the processing executed by the execution unit 1c when the determination unit 1b
10 determines that the processing requested by the client has not yet been performed. The transmission unit 1e also transmits the result of the processing stored in the storage unit 1d when the determination unit 1b determines that the processing requested by the client
15 has already been performed. The Internet 2 transmits information between the server 1 and the clients 3-1 to 3-3. The clients 3-1 to 3-3 are each realized by, for example, a personal computer, and can acquire and display information stored in the server 1, by a browser,
20 and request the server 1 to execute processing.

The operations of the server 1 are explained below.

When a predetermined button provided for transmitting a request is manipulated twice on a screen displayed by a browser activated on the client 3-1, two
25 identical requests (first and second requests) are successively transmitted through the Internet 2 to the server 1. The receiving unit 1a in the server 1 receives

the two requests, and then supplies the requests to the determination unit 1b. The determination unit 1b determines whether or not processing of each request has already been performed. Since, in this case, processing
5 of the first request has not yet been performed, the first request is transferred to the execution unit 1c, and the execution unit 1c executes the processing of the first request. Then, the result of the processing of the first request is supplied to the storage unit 1d and the
10 transmission unit 1e. The storage unit 1d stores the result of the processing, associated with the first request, and the transmission unit 1e returns the result of the processing, which is supplied from the execution unit 1c, to the client 3-1. Thus, the operation in
15 response to the first request is completed, and then an operation in response to the second request is performed as explained below.

The determination unit 1b determines whether or not processing of the second request has already been
20 performed. Since, in this case, the second request is identical to the first request, the determination unit 1b determines that processing of the second request has already been performed, and searches the storage unit 1d for the result of the processing of the first request,
25 and supplies the result of the processing to the transmission unit 1e. The transmission unit 1e returns the result of the processing to the client 3-1. That is,

the server does not repeatedly execute the identical processing, and instead acquires the result of the processing stored in the storage unit 1d. Thus, the client 3-1 receives the two identical results of
5 processing. However, the client 3-1 discards the result of processing which is received first, and displays as valid data the result of processing which is received next (lastly), by the browser.

As explained above, when an identical button is
10 repeatedly manipulated on a browser screen of a client, the server according to the present invention actually executes processing of only the first request. In response to the subsequently received identical requests, the server acquires the result of processing stored in
15 the storage unit 1d, and transmits the stored result to the client. Therefore, the load imposed on the server can be reduced. For example, when a button provided for transmitting information on member registration is successively manipulated on a user registration screen,
20 the server performs an operation of registering a user as a member in response to only the first manipulation of the button. In response to the subsequently received identical requests, the server acquires from the storage unit 1d information on completion of registration, which
25 indicates a result of the processing of registering the user as a member, and supplies the information to the client. Therefore, it is possible to prevent double

registration.

(2) Hardware Construction

Fig. 2 is a diagram illustrating an example of a hardware construction of the server according to the present invention. As illustrated in Fig. 2, the server 10 exchanges information with the clients 3-1 to 3-3 through the Internet 2, and comprises a CPU (Central Processing Unit) 10a, a ROM (Read Only Memory) 10b, a RAM (Random Access Memory) 10c, an HDD (Hard Disk Drive) 10d, and an I/F (Interface) 10e.

The CPU 10a controls the respective portions of the server 10, and executes various kinds of processing in accordance with programs and data stored in HDD 10d. The ROM 10b stores basic programs to be executed by CPU 10a and data used in the execution of the basic programs. The RAM 10c temporarily stores a currently executed program and data related to the execution. The HDD 10d stores data and programs to be executed. The I/F 10e performs protocol conversion, and enables data exchange with the clients 3-1 to 3-3. The Internet 2 is an aggregate of servers distributed over the world, and transmits information between the server 10 and the clients 3-1 to 3-3. The clients 3-1 to 3-3 are each realized by, for example, a personal computer, send a request to the server 1 through the Internet 2, and display information received from the server 1, by a

browser.

(3) Details of Operations

The operations of the server 10 are explained
5 below.

When a client logs in to a server, the server determines whether or not the client is a new client (i.e., a client who first logs into the server), and secures a FIFO for storing requests and a cache for
10 storing results of requested processing when the client is a new client. When the client 3-1 logs into the server 10, the operation of Fig. 3 is performed.

In step S1 of Fig. 3, the CPU 10a determines whether or not the client who logs in to the server is a
15 new client. When 'YES' is determined in step S1, the operation goes to step S2. When 'NO' is determined in step S1, i.e., the client has already logged in to the server, the operation of Fig. 3 is completed. In step S2, the CPU 10a secures a FIFO in a predetermined area of
20 the HDD 10d in order to store for each user at least one request sent from the client. Fig. 4 exhibits examples of use of FIFOs. As illustrated in Fig. 4, a FIFO is secured for each user. In each FIFO, a newly received data item is appended to the end of data items which are
25 already stored, and the oldest data item is first read out. In step S3, the CPU 10a secures a cache in a predetermined area of HDD 10d in order to store for each

user at least one result of processing of at least one request. Fig. 5 exhibits examples which a cache contents. As illustrated in Fig. 5, in the cache, at least one result of processing of at least one request is stored
5 for each user, respectively associated with the at least one request. Thus, when a new client logs in to a server, a FIFO and a cache are secured in the HDD 10d. Alternatively, the FIFO and the cache may be secured in the RAM 10c.

10 When the operation of securing the FIFO and the cache is completed, the server 10 reads out information on a predetermined front page (which is written in the HTML language, and stored in the HDD 10d), and transmits the information on the front page to the client 3-1.

15 When the client 3-1 receives the information on the front page, for example, a window 20 as illustrated in Fig. 6 is displayed on a display device of the client 3-1. Seven buttons 21 to 27 are displayed at the top of the window 20, where the button 21 is provided for going
20 back to a previously displayed page, the button 22 is provided for going forward to a next page, the button 23 is provided for stopping reception (aborting transfer) of information on a new page, the button 24 is provided for printing a currently displayed page, the button 25
25 is provided for reducing the size of the window 20, the button 26 is provided for expanding the size of the window 20, and the button 27 is provided for closing the

5 window 20. The display area of the window 20 is comprised of right and left frames (columns), where the left frame contains TOC (Table of Contents) links, and the right frame contains the body of the document. The form in the right frame of the window 20 in Fig. 6 contains a title of the home page, a text box 29 for inputting a keyword, and a SEARCH button 30 provided for starting (requesting) a keyword search operation.

10 First, the present invention is explained below for the case of a search operation.

When the client 3-1 detects manipulation (clicking) of the SEARCH button 30, the client 3-1 transmits to the server 10 a search request corresponding to the manipulation of the SEARCH button 15 30 and a keyword in the text box 29. For example, when a keyword "Pottery" is input into the text box 29 as illustrated in Fig. 7, and the SEARCH button 30 is manipulated twice by placing the pointer 40 on the SEARCH button 30 and clicking a mouse, two identical 20 search requests (first and second search requests) are successively transmitted to the server 10. When the server 10 receives the above search requests, the server 10 operates in accordance with the flow of Fig. 8, as explained below.

25 In step S20 of Fig. 8, the CPU 10a acquires each of the requests received as above, through the I/F 10e, refers to an IP (Internet Protocol) address of the

client, which is contained in each request, searches a FIFO corresponding to the IP address, which is secured in the HDD 10d, and appends the requests to the end of contents of the FIFO. If the FIFO is empty, the above
5 two requests received from the client 3-1 are stored from the top address of the FIFO in the order of reception.

In step S21, the CPU 10a acquires the request stored at the top address of the FIFO. In this example,
10 the first request, which is received first, is acquired by the CPU 10a.

In step S22, the CPU 10a determines whether or not the FIFO stores only one request. When yes is determined, the operation goes to step S24. When no is determined,
15 the operation goes to step S23.

In step S23, the CPU 10a prohibits reading of each request remaining in the FIFO. In this example, the second search request (which is received secondly, and remains in the FIFO) is prohibited to be read out from
20 the FIFO. The operation of step S23 is performed in order to prevent execution of processing of requests other than the request acquired in step S21.

In step S24, the CPU 10a determines whether or not the request acquired in step S21 is identical to a
25 previously processed request. When 'YES' is determined, the operation goes to step S27. When 'NO' is determined, the operation goes to step S25.

In step S25, the CPU 10a executes processing of the request acquired in step S21 by acquiring necessary information from the HDD 10d. Since, in this example, the request is the search request based on the keyword
5 "Pottery," a program for performing a search operation is acquired from the HDD 10d, an information item corresponding to the keyword "Pottery" is searched for in a database stored in the HDD 10d.

10 In step S26, the CPU 10a stores the result of the processing executed in step S25 and the processed request in the cache secured in the HDD 10d. In this example, the search request and the information item corresponding to the keyword "Pottery" are stored in the cache.

15 In step S27, the CPU 10a acquires a result of processing stored in the cache corresponding to a request which is identical to the request acquired in step S21.

20 In step S28, the CPU 10a transmits the result of processing obtained in step S25 or S27, to the client which has sent the request acquired in step S21 to the server 10.

25 In step S29, the CPU 10a removes the prohibition against the reading of the request stored in the FIFO, so that the request stored in the FIFO can be read out.

In step S30, the CPU 10a determines whether or not the operation of Fig. 8 is continued. When yes is

determined, the operation goes to step S21. When no is determined, the operation of Fig. 8 is completed. In this example, when the result of the processing of the first search request is transmitted to the client 3-1 in
5 step S28, and the prohibition against the reading of the second search request stored in the FIFO is removed in step S29, the operation goes to step S21, and the CPU 10a acquires the second search request from the FIFO. Since, in this case, no other request is stored in the
10 FIFO, the operation goes to step S24. Since the second search request is identical to the first search request, the CPU 10a determines, in step S24, that the request acquired in step S21 is identical to a previously processed request, and the operation goes to step S27.
15 In step S27, the CPU 10a acquires from the cache the result of the processing of the first search request. Then, the acquired result is transmitted to the client 3-1 in step S28.

Consequently, in the example in which the two
20 identical search requests are sent to the server 10, the client 3-1 receives two identical search results. In this case, the browser discards the first search result, and displays the second search result, for example, as illustrated in Fig. 9. In Fig. 9, a search result based
25 on the keyword "Pottery" is displayed in the right frame 28 of the window 20.

When the client 3-1 logs out of the server 10, or

when the server 10 is not accessed by the client 3-1 for a predetermined time, the FIFO and the cache for the client 3-1 are deleted from the HDD 10d or the RAM 10c.

As explained above, the CPU 10a of the server 10
5 actually processes only the first one of identical requests from each client, stores in a cache the result of the processing of the first one of the identical requests for each client, and transmits the result to each client which has sent the first one of the
10 identical requests. Thereafter, in response to the subsequent ones of the identical requests from each client, the CPU 10a acquires from the cache the result of the processing of the first one of the identical requests for each client, and transmits the acquired
15 result to each client. Therefore, it is possible to prevent the server from repeatedly executing identical processing, and substantially increase processing speeds of the server.

Next, the present invention is explained below for
20 the case of an operation of registering a user as a member.

When another of the TOC links, "Membership," is clicked, a form for registering a user as a member is displayed in the right frame, as illustrated in Fig. 10.
25 The form in the right frame of the window 20 in Fig. 10 is displayed for inputting information necessary for member registration, and contains text boxes for

inputting the name, postal address, and e-mail address of the user, and option buttons for inputting the gender of the user.

Incidentally, when the above information is
5 written in the Japanese language, full-size characters each having a width of an em, and half-size characters each having a width of an en are mixed in the texts entered in the text boxes. In the current Japanese language input systems, it is necessary to press an
10 enter key in order to confirm and fix a Japanese word comprised of at least one full-size Japanese character after a corresponding sequence of characters is typed into a text box, although it is unnecessary to press the enter key after half-size characters are input. In such
15 a situation, users apt to inadvertently press the enter key even after the input of half-size characters. In addition, when the enter key is pressed after half-size characters are input, the client (computer) recognizes that the transmission button 51 is clicked in the form
20 of Fig. 10. Therefore, even when the enter key is erroneously pressed, the client transmits a member registration request with the information displayed in the right frame of the window 20 in Fig. 10, to the server. When the user does not notice the transmission
25 of the member registration request due to the inadvertent pressing of the enter key, the user further manipulates the transmission button 51 after the

inadvertent pressing of the enter key, with the intention of transmitting a member registration request to the server 10. Consequently, two identical member registration requests are inadvertently transmitted from the client to the server. When the conventional servers receives two or more identical member registration requests from the same user, the user is multiply registered in the server since no provision is made for preventing the multiple registration.

However, according to the present invention (e.g., the sequence of Fig. 8), the server executes the processing of registering the user as a member for only the first member registration request. When the server subsequently receives a further member registration request which is identical to the first member registration request, the server determines that the further member registration request is identical to the first member registration request, and transmits to the client information for displaying a result of the registration conducted in response to the first member registration request. Fig. 11 exhibits an example of the window 20 in which a result of the registration is displayed. In the right frame 28 of the window 20 of Fig. 11, details of the registration and a message that the user has been registered with the displayed contents are displayed. The information for displaying the window 20 of Fig. 11 is transmitted from the server to the client

every time a member registration request is transmitted from the client to the server.

As explained above, according to the present invention, even when a plurality of identical requests
5 which are not appropriate to be repeatedly processed are transmitted from a client to the server, the server actually processes only the first one of the plurality of identical requests, stores the result of the processing of the first one of the plurality of
10 identical requests, and transmits the result to a client which has sent the first one of the plurality of identical requests. Thereafter, in response to the subsequent ones of the plurality of identical requests, the server acquires the result of the processing of the
15 first one of the plurality of identical requests, and transmits the acquired result to the client. Therefore, it is possible to prevent repeated processing of the identical requests, and a problem due to the repeated processing of the identical request. For example, it is
20 not appropriate to repeatedly register an identical user with identical information. According to the present invention, it is possible to prevent repeated registration of an identical user with identical information.

25 In the present specification, the requests may or may not contain client identification information (user identification information), in addition to the details

of processing which the server is requested to execute.

In the case where requests do not contain client identification information, when a result of processing of a request R received from a client A (user X) is
5 stored in the storage unit 1d (in Fig. 1), and the server receives from another client B (user Y) a request which is identical to the request R, the determination unit 1b determines, in step S24 in Fig. 8, that a result of processing of a request which is identical to the
10 request from the client B is stored, and the operation goes to step S27 to acquire the stored result of the processing of the request R, and the transmission unit 1e transmits the acquired result to the client B. Since, in this case, a result of processing of the first
15 request is stored in the server regardless of the client which has sent the request, and the stored result is used as a response to a subsequent request which is identical to the first request of which the result of processing is stored, even when the subsequent request
20 is sent from a different client from the client which has sent the first request. Therefore, the load imposed on the server is greatly reduced.

In the case where requests contain client identification information, when a result of processing
25 of a request R received from a client A (user X) is stored in the storage unit 1d, and the server receives from another client B (user Y) another request which is

identical to the request R, the determination unit 1b determines, in step S24 in Fig. 8, that a result of processing of a request which is identical to the request from the client B is not stored for the client B,
5 and the operation goes to step S25 to process the request R received from the client B, and the transmission unit 1e transmits the processed result to the client B. When the result of processing of the request R received from the client A (user X) is stored
10 in the storage unit 1d, and the server receives from the same client A (user X) a request which is identical to the request R, the determination unit 1b determines, in step S24 in Fig. 8, that the result of processing of the identical request is stored for the identical client A,
15 and the operation goes to step S27 to acquire the stored result of the processing of the request R, and the transmission unit 1e transmits the acquired result to the client A. Therefore, even in this case, it is possible to reduce a load which is imposed on the server
20 due to repeated transmission of a request from a client. For example, even when a user transmits more than one identical request by mistake, it is possible to reduce a load which is imposed on the server due to the user's mistake.

25

(4) Other Matters

(i) The operations and the functions of the

present invention may be realized by using at least one product with the server, e.g., by installing a computer-readable medium in a computer. The product is such that when the product is used with a server (e.g., a computer), the product is able to output control information which directs the server to realize any of the functions of the present invention. The product may be a semiconductor storage device including a ROM, or a magnetic storage medium such as a floppy disc, a hard disk and an MO disk, or a CD-ROM, a CD-R, a DVD-ROM, a DVD-RAM, a DVD-R, or the like, which stores a program which realizes the above functions. Further, the above product may be a programmed hardware logic circuit such as an LSI. The above product can be put into the market. Alternatively, program data realizing the above functions may be transferred through a communication network from a storage device included in a computer system to another computer system. In order to execute the program in a processor (computer) system, for example, the program stored in a hard disk is loaded in a main memory of the processor (computer) system.

(ii) The foregoing is considered as illustrative only of the principle of the present invention. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and applications shown and described, and accordingly, all

suitable modifications and equivalents may be regarded as falling within the scope of the invention in the appended claims and their equivalents.

(iii) All of the contents of the Japanese patent
5 application, No.2000-026019 are incorporated into this specification by reference.

What is claimed is:

1. A server comprising:

a result storing unit which stores at least one processing result of at least one request;

5 a receiving unit which receives a request for processing from a client;

a determination unit which determines whether or not another request which is identical to the request received from the client, has already been processed;

10 an execution unit which executes processing of the request received from the client, and stores a result of the processing in said result storing unit when said determination unit determines that no other request which is identical to the request received from the client has
15 been processed; and

a transmission unit which transmits to said client said result of the processing executed by said execution unit when said determination unit determines that no other request which is identical to the request
20 received from the client has been processed, and transmits to said client one of said at least one processing result corresponding to the request received from the client when said determination unit determines that another request which is identical to the request received from the client,
25 has already been processed.

2. A server according to claim 1, wherein said

determination unit determines whether or not another request which is identical to the request received from the client, has already been processed, when another request is received from said client.

5

3. A server according to claim 1, further comprising,

a request storing unit which stores at least one request received from at least one client,

10

a request reading unit which reads out one of said at least one request stored in said request storing unit, and

15

a prohibiting unit which prohibits the operation of said request reading unit after one of said at least one request stored in said request storing unit is read out until a processing result corresponding to said one of said at least one request is transmitted to a client.

20

4. A product for use with a server, said product, when used with said server, is able to output control information which directs the server to realize:

a result storing unit which stores at least one processing result of at least one request;

25

a receiving unit which receives a request for processing from a client;

a determination unit which determines whether

or not another request which is identical to the request received from the client, has already been processed;

an execution unit which executes processing of the request received from the client, and stores a result
5 of the processing in said result storing unit when said determination unit determines that no other request which is identical to the request received from the client has been processed; and

a transmission unit which transmits to said
10 client said result of the processing executed by said execution unit when said determination unit determines that no other request which is identical to the request received from the client has been processed, and transmits to said client one of said at least one processing result
15 corresponding to the request received from the client when said determination unit determines that another request which is identical to the request received from the client, has already been processed.

20 5. A product according to claim 4, wherein said determination unit determines whether or not another request which is identical to the request received from the client, has already been processed, when another request is received from said client.

25

6. A product according to claim 4, further comprising,

a request storing unit which stores at least one request received from at least one client,

a request reading unit which reads out one of said at least one request stored in said request storing
5 unit, and

a prohibiting unit which prohibits the operation of said request reading unit after one of said at least one request stored in said request storing unit is read out until a processing result corresponding to
10 said one of said at least one request is transmitted to a client.

ABSTRACT OF THE DISCLOSURE

In a server which receives a request of processing from a client, and returns a processing result of the request to the client, a result storing unit stores at least one processing result of at least one request. When a determination unit determines that no other request which is identical to a request received from a client has been processed, an execution unit executes processing of the request received from the client, and stores a result of the processing in the result storing unit. When the determination unit determines that another request which is identical to a request received from a client has already been processed, a transmission unit transmits to the client one of the at least one processing result corresponding to the request received from the client.

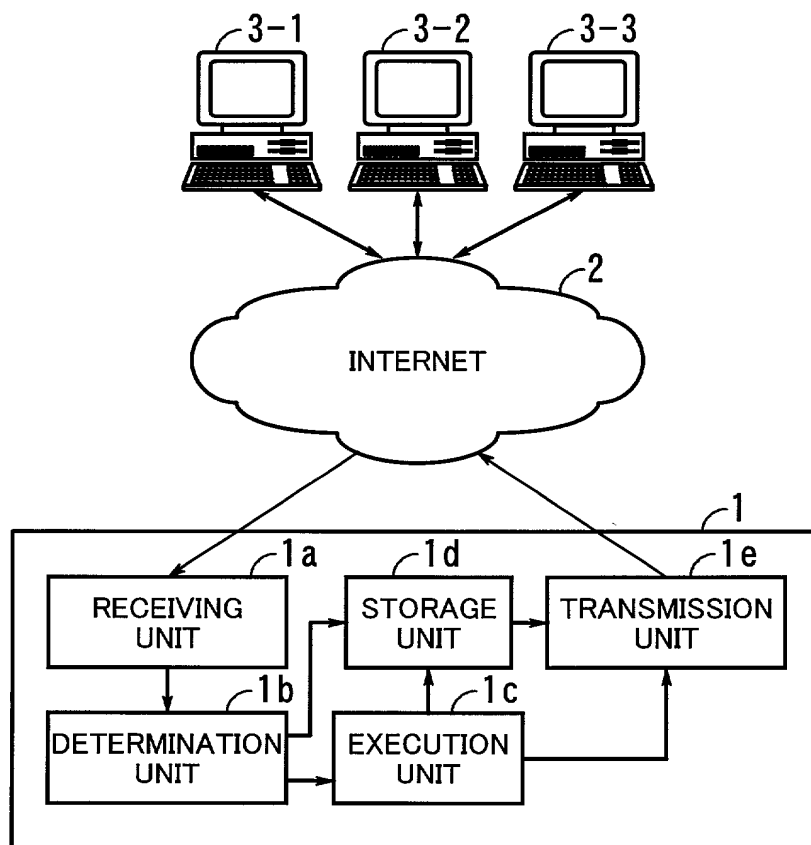


FIG. 1

FIG. 2 is a block diagram of a network system.

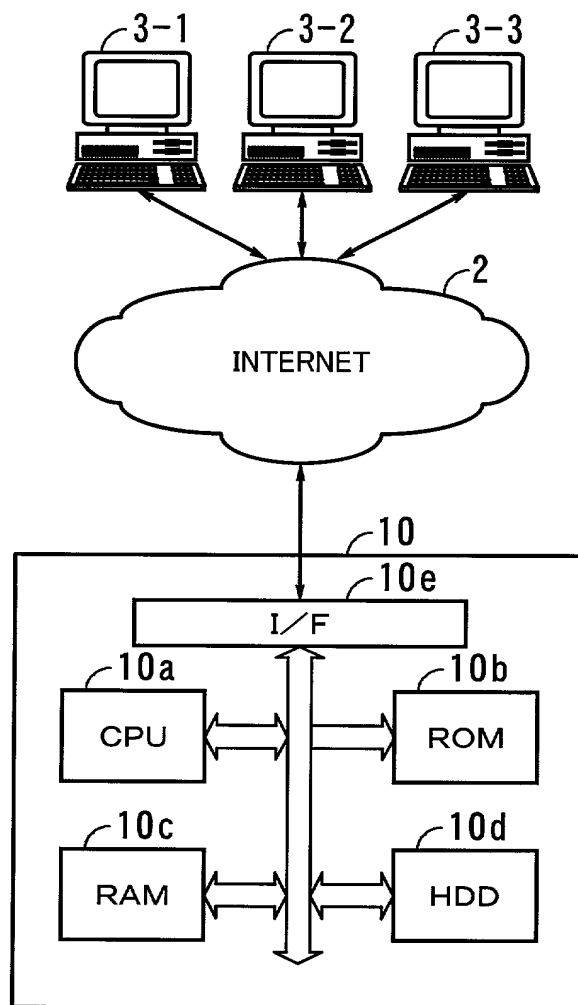


FIG. 2

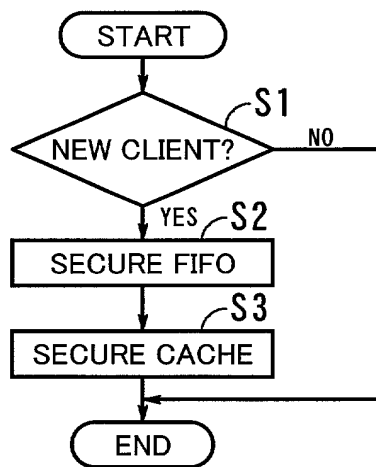


FIG. 3

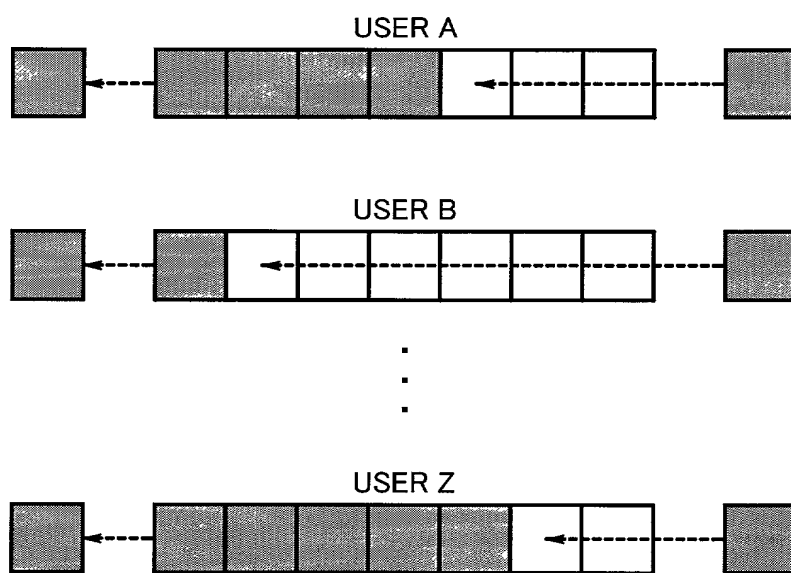


FIG. 4

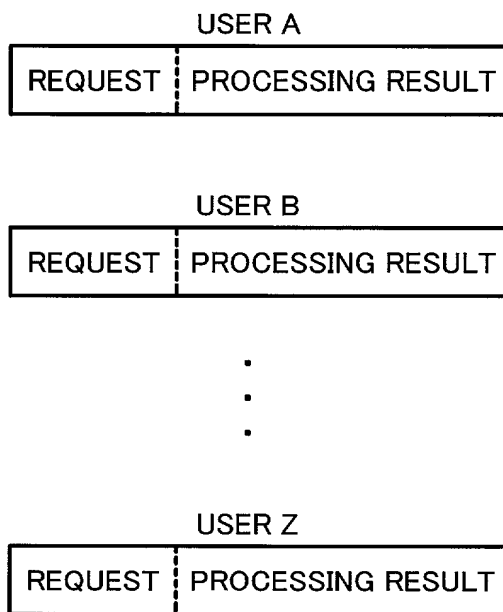


FIG. 5

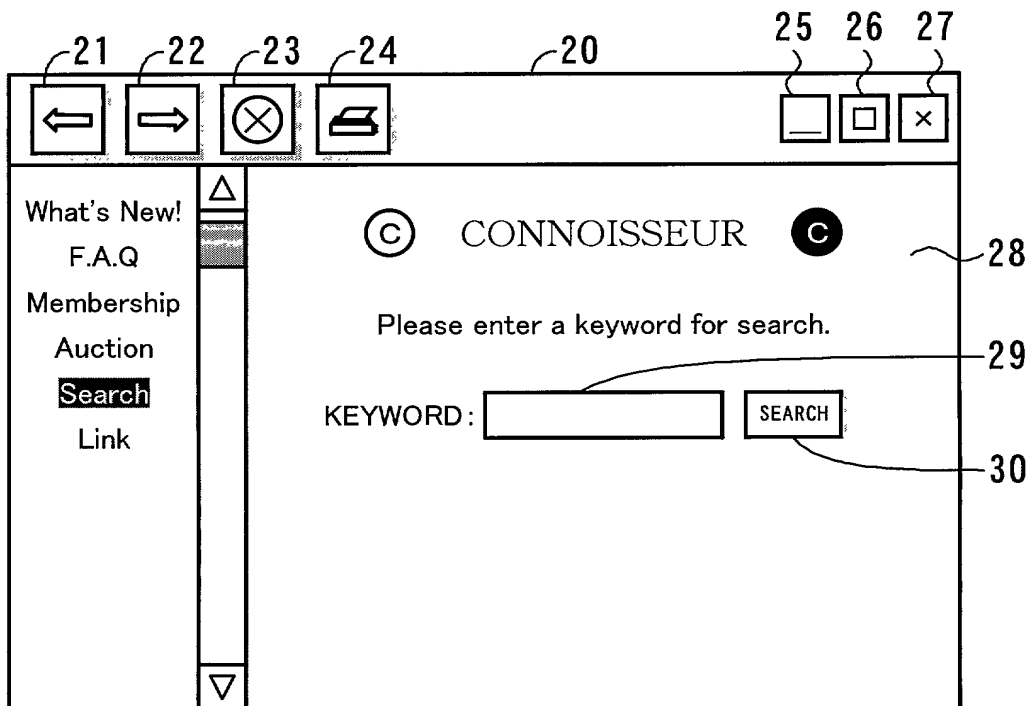


FIG. 6

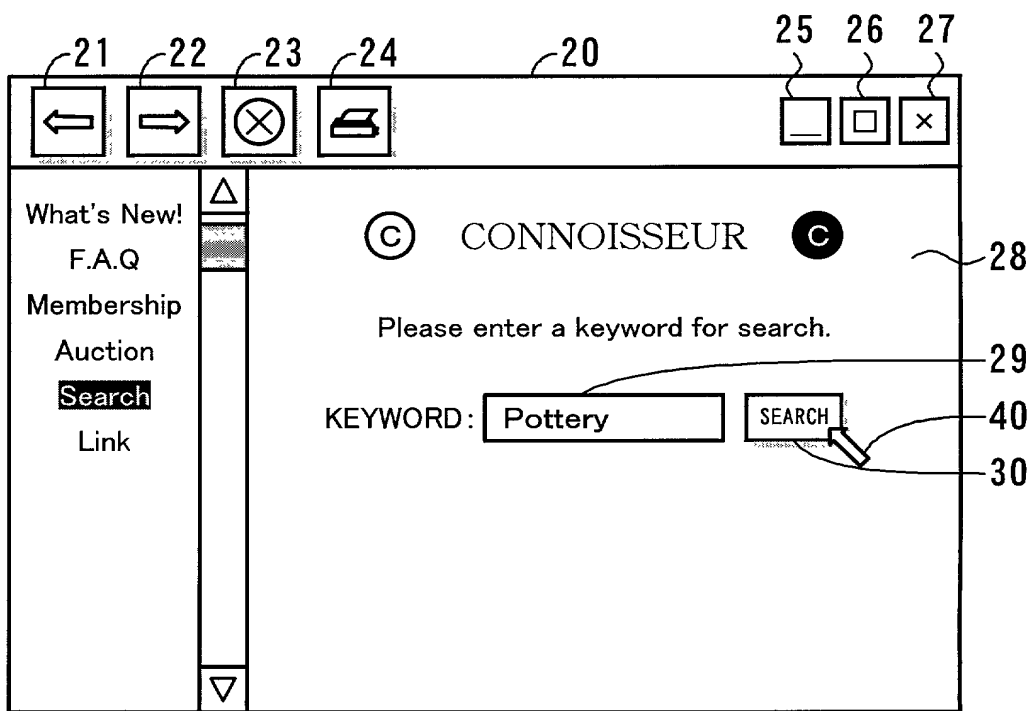


FIG. 7

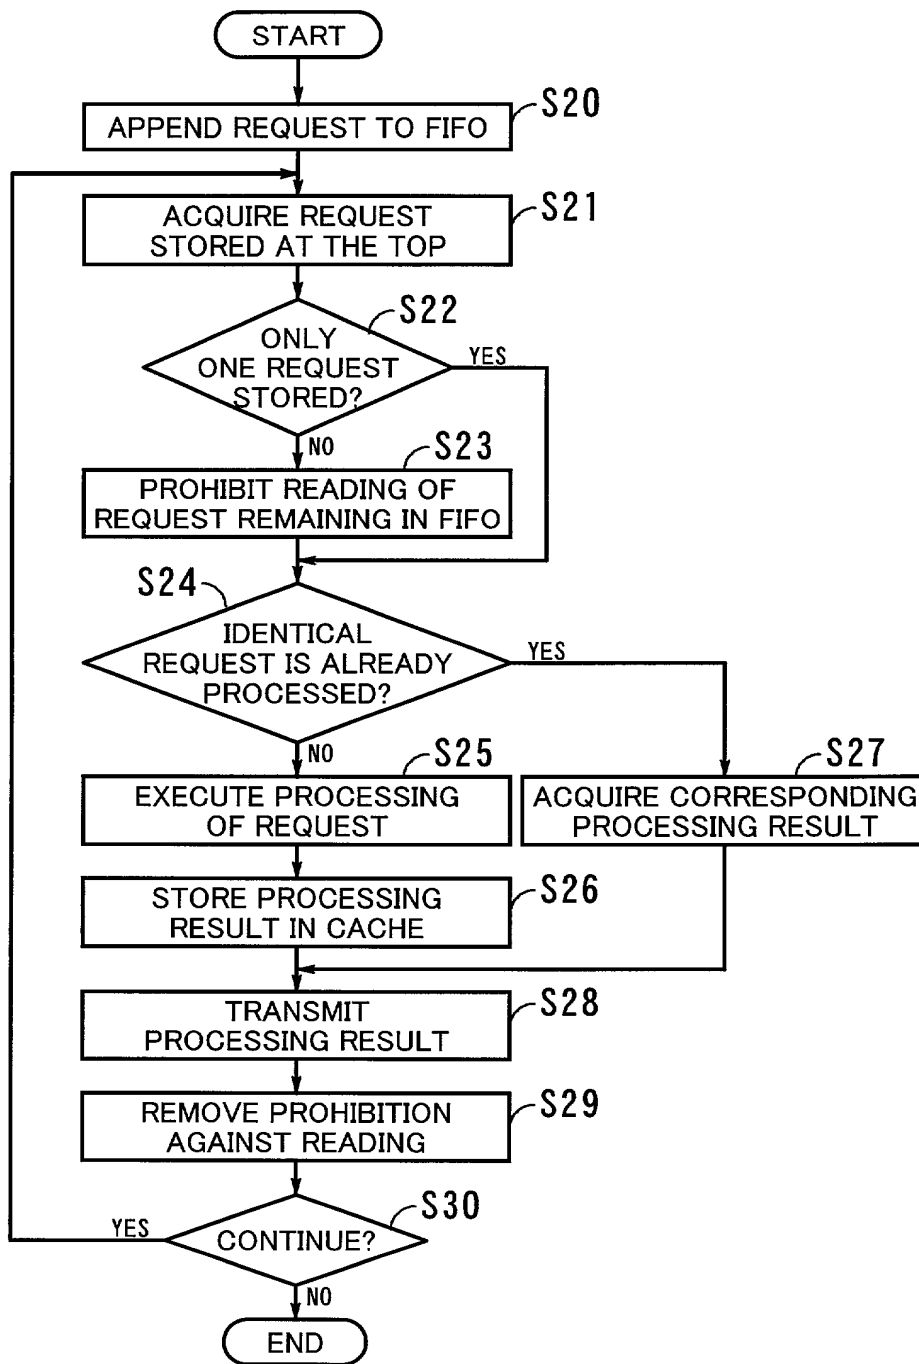


FIG. 8

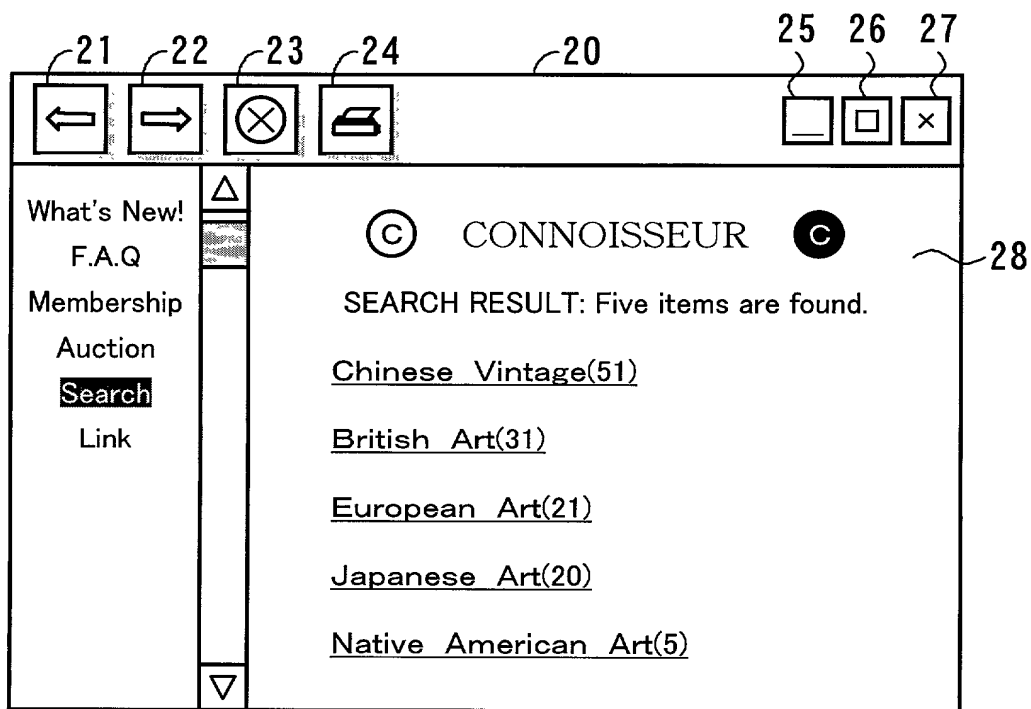


FIG. 9

21 22 23 24 20 25 26 27

What's New!
F.A.Q
Membership
Auction
Search
Link

© CONNOISSEUR ©

MEMBER REGISTRATION

NAME 石田 秀作

GENDER MALE ☒ FEMALE ☐

POSTAL ADDRESS 東京都新宿区1-1-1

e-mail abc@efg.co.jp

TRANSMISSION CANCEL

28 50 51 52

The image shows a web browser window with a title bar (20) containing standard navigation buttons (21: back, 22: forward, 23: stop, 24: home) and window control buttons (25: minimize, 26: maximize, 27: close). The browser displays a website with a left sidebar menu (28) listing 'What's New!', 'F.A.Q', 'Membership' (highlighted), 'Auction', 'Search', and 'Link'. The main content area (50) is titled '© CONNOISSEUR ©' and 'MEMBER REGISTRATION'. It contains a form with the following fields: 'NAME' (石田 秀作), 'GENDER' (MALE selected with a radio button, FEMALE unselected), 'POSTAL ADDRESS' (東京都新宿区1-1-1), and 'e-mail' (abc@efg.co.jp). At the bottom of the form are two buttons: 'TRANSMISSION' (51) and 'CANCEL' (52).

FIG. 10

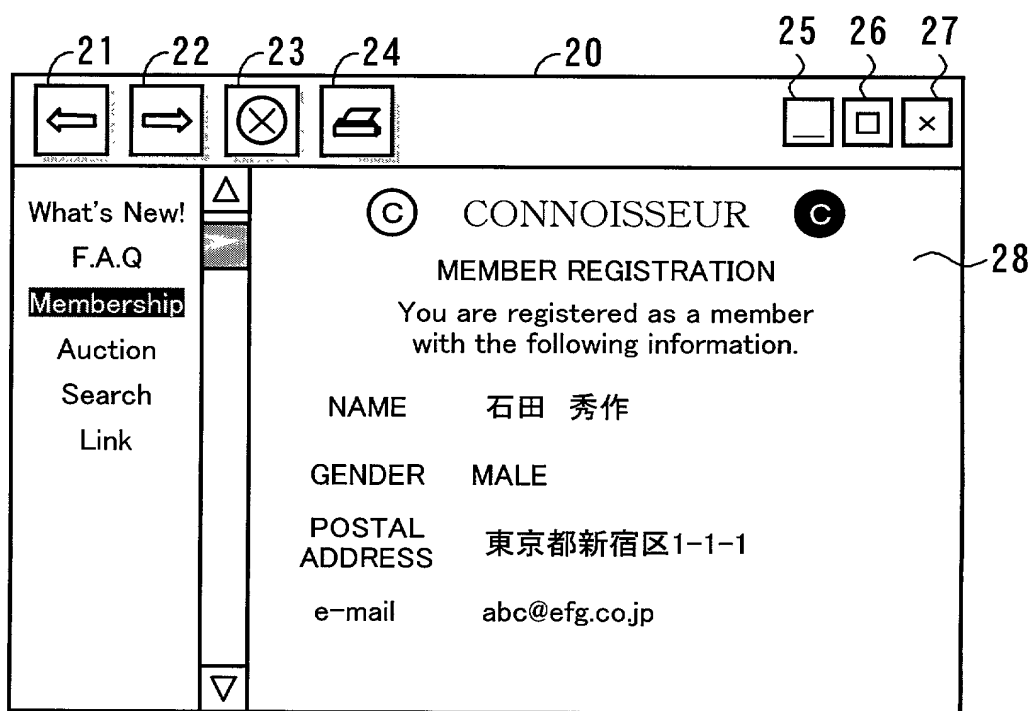


FIG. 11

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
SERVER STORING PROCESSING RESULT OF
FIRST REQUEST AND RETURNING STORED
PROCESSING RESULT IN RESPONSE TO
IDENTICAL REQUESTS

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

00-026019

(Number)

(番号)

Japan

(Country)

(国名)

(Number)

(番号)

(Country)

(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

03/02/2000

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

☐☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故ぜによる虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許審判局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
士氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor		
	Minoru YAMAMOTO		
発明者の署名	日付	Inventor's signature	Date
		<i>Minoru Yamamoto</i>	Sept. 20, 2000
住所	Residence		
	Tokyo, Japan		
国籍	Citizenship		
	Japanese		
私書箱	Post Office Address		
	c/o FUJITSU BUSINESS SYSTEMS LIMITED, 7-27, Kouraku 1-chome, Bunkyo-ku,		
	Tokyo 112-8572 Japan		
第二共同発明者	Full name of second joint inventor, if any		
	Takashi KANEDA		
第二共同発明者	日付	Second inventor's signature	Date
		<i>Takashi Kaneda</i>	Sept. 20, 2000
住所	Residence		
	Tokyo, Japan		
国籍	Citizenship		
	Japanese		
私書箱	Post Office Address		
	c/o FUJITSU BUSINESS SYSTEMS LIMITED, 7-27, Kouraku 1-chome, Bunkyo-ku,		
	Tokyo 112-8572 Japan		

(第三以降の共同発明者についても同様に記載し、署名を
すること)

(Supply similar information and signature for third and subsequent
joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Yuji IWASAKI		
第三共同発明者	日付	Third inventor's signature <i>Yuji Iwasaki</i>	Date Sept. 20, 2000
住 所	Residence Tokyo, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU BUSINESS SYSTEMS LIMITED, 7-27, Kouraku 1-chome, Bunkyo-ku, Tokyo 112-8572 Japan		
第四共同発明者	Full name of fourth joint inventor, if any Hiroki UEDA		
第四共同発明者	日付	Fourth inventor's signature <i>Hiroki Ueda</i>	Date Sept. 20, 2000
住 所	Residence Tokyo, Japan		
国 籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU BUSINESS SYSTEMS LIMITED, 7-27, Kouraku 1-chome, Bunkyo-ku, Tokyo 112-8572 Japan		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)